



COLUMNS

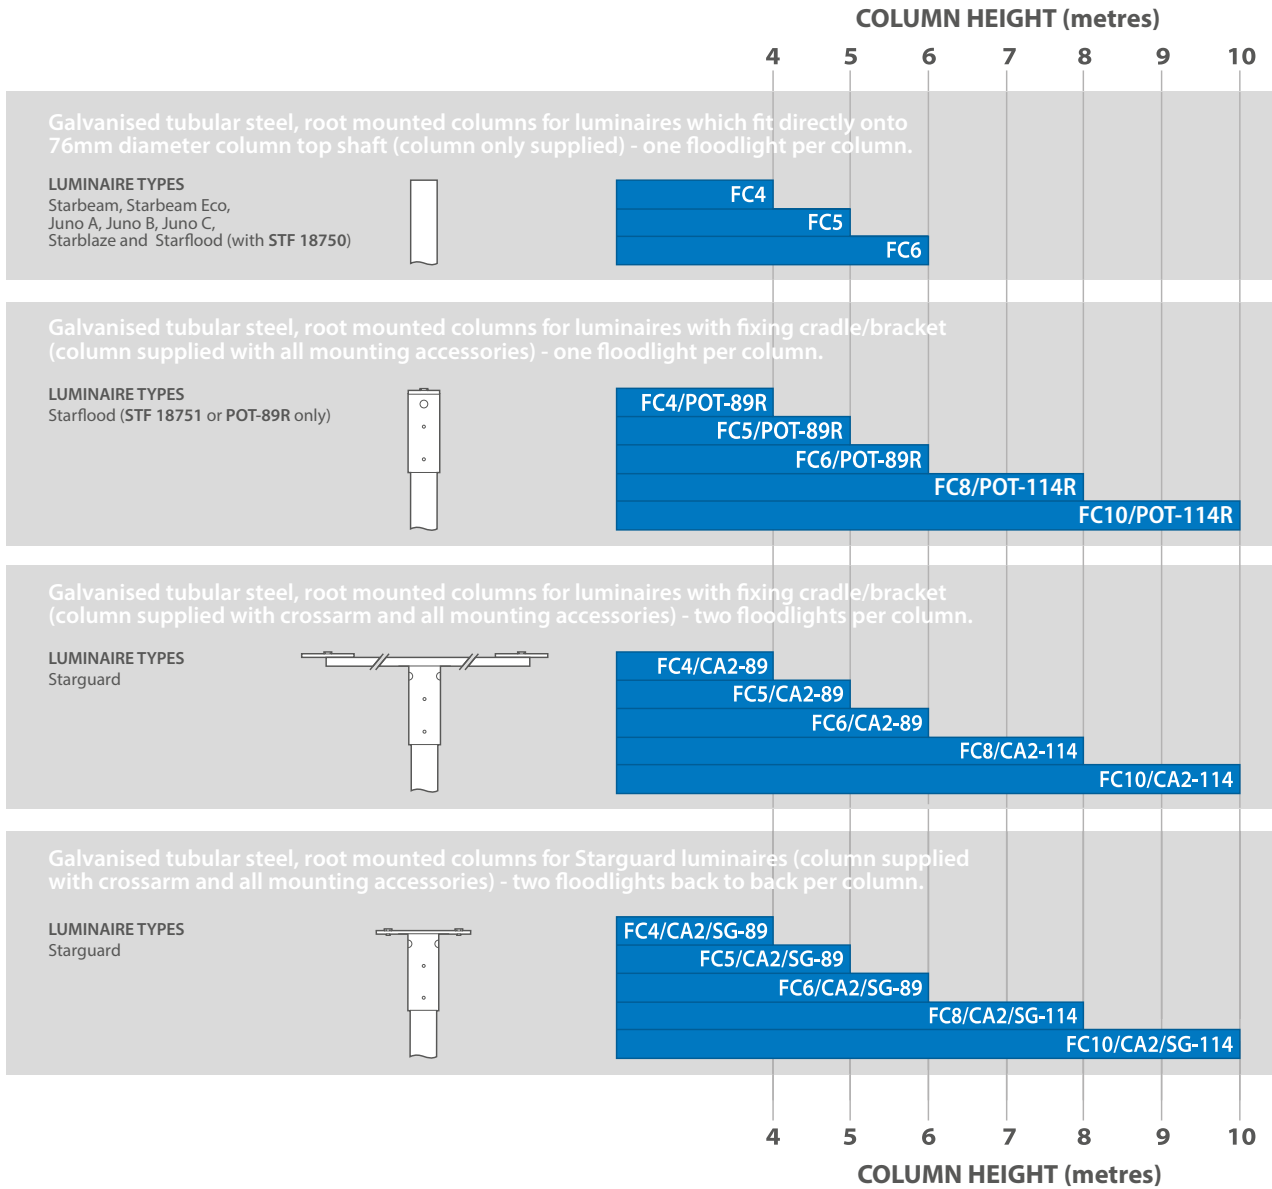

COLUMN ACCESSORIES

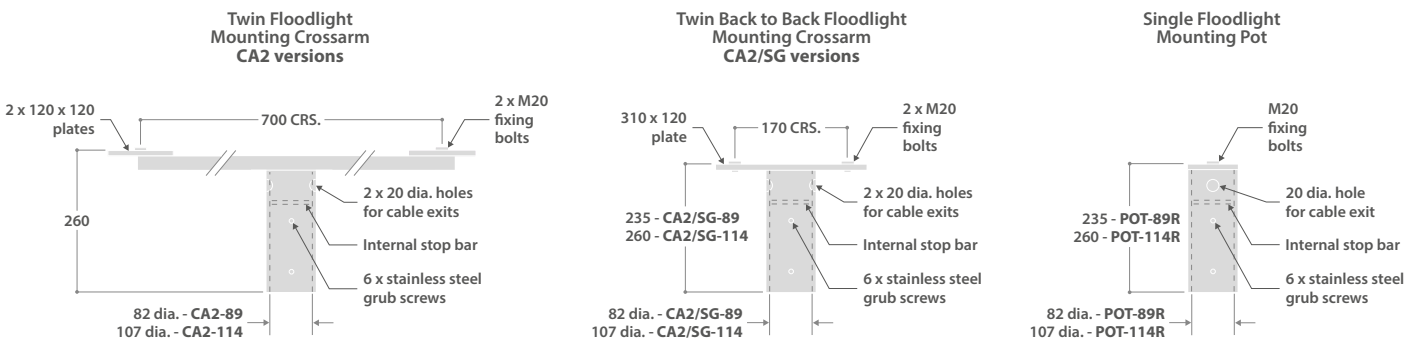

Add catalogue number of accessory to column catalogue number (see table above). Accessories are also available as separate items.

POT-89R or CA2-89 or CA2/SG-89 - fits over 76 dia. shaft 4, 5 and 6m columns

POT-114R or CA2-114 or CA2/SG-114 - fits over 101 dia. spigot insert on 8 and 10m columns

SPECIFICATION

- Stepped tubular galvanised steel columns, to BS EN 40-2:2004
- Mounting accessories are hot dip galvanised to BS EN ISO 1461:2009
- Supplied with wooden baseboard for mounting cable connection accessories
- Accessories are easily fixed with stainless steel grub screws and have an internal stop to ensure cable exit


UK DELIVERY

Columns are delivered to site at a pre-arranged time. An off-loading service is not included and it is the responsibility of the client (or client's agent) for the safe undertaking of this requirement. A fork lift truck is recommended to minimise manual handling.

NON-STANDARD COLUMNS

The following additional options are available on request:

- **3 and 4 way crossarms** - please ask us to confirm column suitability regarding head weight and windage.
- **Tubular steel columns with additional T-wash and matt black primer paint finish** - specify using suffix **PR** after column reference e.g. **FC5/PR/POT-89R**.
- **Flange plate mounted columns** - specify using suffix **FL** after column reference e.g. **FC5/FL/POT-89R**.
- **Mid/base hinged columns** - contact our Technical Department for further information

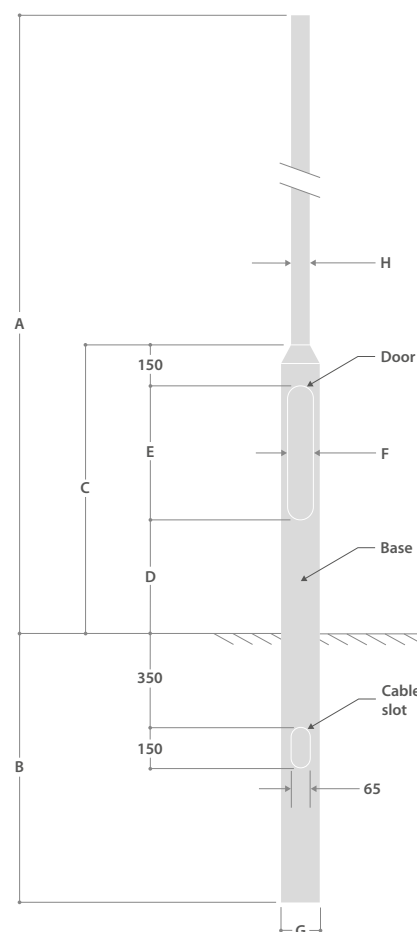

RANGE

NOMINAL HEIGHT	CAT. No.	PLANTING DEPTH	BASE HEIGHT	DOOR HEIGHT	DOOR DIMENSIONS		BASE DIAMETER	SHAFT DIAMETER	APPROX. kg	BASEBOARD SIZE
A		B	C	D	E	F	G	H		
Starbeam Columns										
6m	FC6/89	800	1280	300	600	115	168	89	68	89 (w) x 500 (h)
8m	FC8/89	800	1280	300	600	115	168	114▲	100	89 (w) x 600 (h)
10m	FC10/89	1000	1280	300	600	115	168	114▲	142	89 (w) x 600 (h)
Standard Columns										
4m	FC4	800	925	300	500	100	140	76	33	89 (w) x 500 (h)
5m	FC5	800	925	300	500	100	140	76	40	89 (w) x 500 (h)
6m	FC6	1000	925	300	500	100	140	76	44	89 (w) x 500 (h)
8m	FC8	1200	1200	400	600	115	168	114■	100	89 (w) x 600 (h)
10m	FC10	1500	1300	500	600	115	168	114■	142	89 (w) x 600 (h)
12m	FC12/101	1700	1800	1000	600	115	192	140■	226	89 (w) x 600 (h)

▲ Reduced at top to 89mm to accept Juno pole top mounting options

■ Reduced at top to 101mm to accept accessories