Mina-S

Adjustable recessed accent downlights

The Mina-S is a discreet recessed-mounted display luminaire.

Mina-S provides 355° azimuth adjustment and a 60° range of vertical adjustment, and is available in either 5 W or 8 W versions. It is part of the Mina family of downlighters.

Applications: reception areas, retail, display, halls of residence, hotels, restaurants, and museums.

- Spot 21° and Flood 45° beam angle versions
- 355° azimuth adjustment
- 60° vertical adjustment
- Supplied with remote gear unit fitted with 2 m lead
- Luminaires can be supplied pre-wired with a purpose made 1 m connection lead for plugging directly into the Smart Hub
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications

Notes: Black and silver finishes and CRI 80 version available to special order (minimum order quantity applies)



IP20 **Up to 87.5 LL/CW**

Specification

Mounting	**Recessed**	IP rating	**IP20**

Lighting

Distribution	**21° beam** **45° beam**	Lumen output	**455 lm - 775 lm**
Efficacy	**Up to 87.5 LL/CW**		

Power

LED power	**5 W - 8 W**	Circuit power	**6 W - 9 W**

Mina-S

Construction

Housing	**Die-cast aluminium ring assembly**	Body colour	**Satin white**
Optical assembly	**High performance aluminium reflector with injection moulded anti-glare bezel**		

LED characteristics


CRI	**90+**	Colour temperature	**3000 K** **4000 K**
Rated life (hours)	**60 K - L70/B10**	LED protection	**-**
Driver efficiency	**>80%**	Power factor	**>0.9**
MacAdam ellipse	**3 Step**	Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**

Compliance


UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class E**		

Dimensions


Round Version

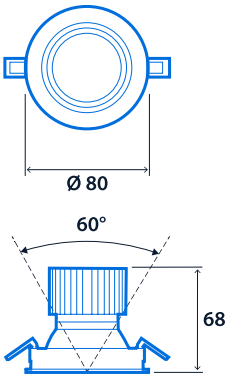

Square Version

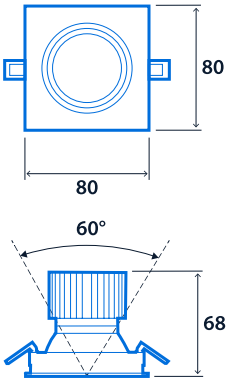

Standard Remote Driver

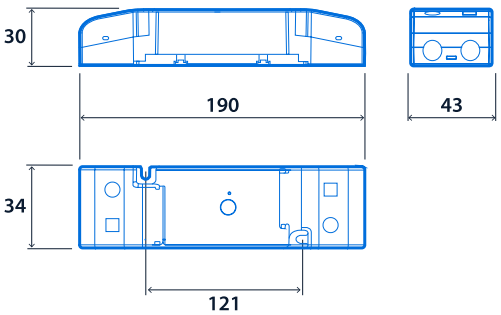

Cut-out - Ø 75
Minimum ceiling void - 120

Range

	Colour temperature	LED power	21° beam	45° beam	Lighting control system
Round	3000 K	5 W	**MA17930**	**MA17934**	**A / L**
		8 W	**MA17931**	**MA17935**	**A / L**
	4000 K	5 W	**MA17932**	**MA17936**	**A / L**
		8 W	**MA17933**	**MA17937**	**A / L**
Square	3000 K	5 W	**MA17938**	**MA17942**	**A / L**
		8 W	**MA17939**	**MA17943**	**A / L**
	4000 K	5 W	**MA17940**	**MA17944**	**A / L**
		8 W	**MA17941**	**MA17945**	**A / L**

Lighting control system - suffix catalogue number with **A** Dimming (DALI) / **L** Non-dimming
Hub version - suffix catalogue number with **SHL** (**Only** available with **L** control type)

E.g. **MA17930LSHL** = Round / 3000 K / 5 W / 21° beam / Non-dimming / Hub version





Click or scan here

View Mina-S variants using our online filtering tool



Information is correct as of 16-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.