Track


Universal lighting track system

Track lighting provides a way to install luminaires in a space while maintaining flexibility for future changes, allowing luminaires to be added, removed, or repositioned quickly and without additional cabling.

Track-mounted Thorlux luminaires include Strike S, Strike M, and DuoFlux.

- Recessed or surface mount versions
- 3-Circuit or DALI 3-circuit versions
- Modular connections for extending/joining track
- Track can be cut to size during installation if required. Bending tool is required
- Surface track can be suspended using optional wire suspension kit - see finishing components
- Maximum system current 16A
- Black and silver finishes available to special order (minimum order quantity applies)

Notes: See installation guide for mounting point locations

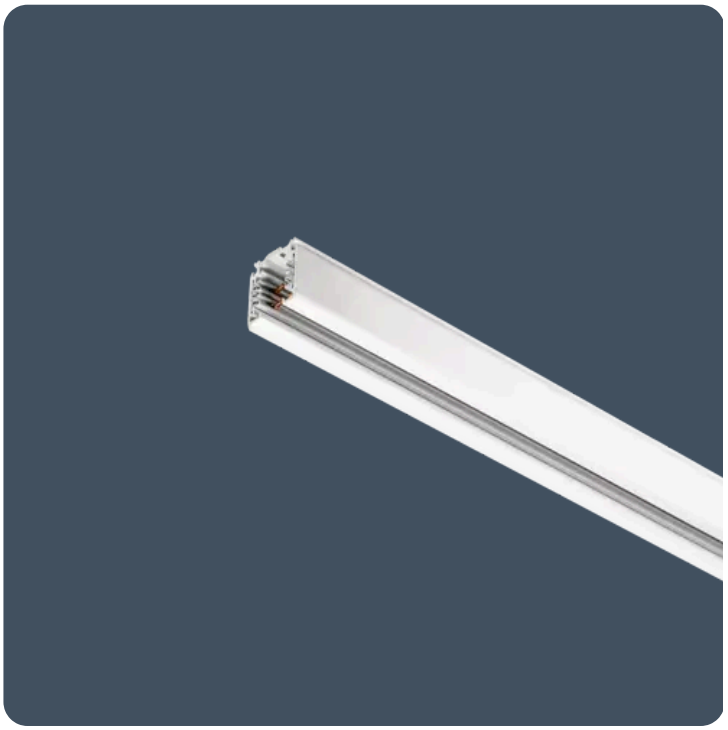

IP20

Specification

Mounting	**Track**	IP rating	**IP20**
Nominal size	**1 m** **2 m** **3 m**		

Construction

Housing	**Extruded aluminium track**	Body colour	**Satin white**


Compliance

UKCA	**Yes**	CE	**Yes**


Track

Dimensions


3-Circuit Track




3-Circuit Track Recessed




DALI 3-Circuit




DALI 3-Circuit Recessed




Cover Plate - Cross (Recessed Feed)




Cover Plate - Straight (Recessed Feed)




Flexible Coupler




Straight Coupler




Tee Feed/Coupler




Angled Feed/Coupler



Cross feed

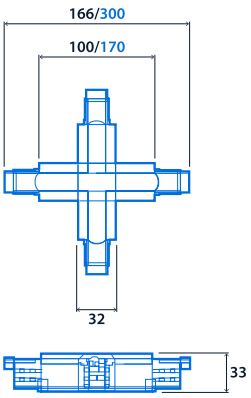

Feed



NOTE: Dimensions 3-Circuit/DALI 3-Circuit

Range

Mounting	Nominal size	3-circuit	DALI 3-circuit
Recessed	1 m	**TRK18430**	**TRK18447**
	2 m	**TRK18431**	**TRK18448**
	3 m	**TRK18432**	**TRK18449**
Surface *	1 m	**TRK18433**	**TRK18450**
	2 m	**TRK18434**	**TRK18451**
	3 m	**TRK18435**	**TRK18452**

* Surface track can be suspended using optional wire suspension kit

Feeds

Product code	Description	Weight
TRK18438	Feed - 3-circuit - Left hand	-
TRK18439	Feed - 3-circuit - Right hand	-
TRK18455	Feed - DALI 3-circuit - Left hand	-
TRK18456	Feed - DALI 3-circuit - Right hand	-

Couplers


Product code	Description	Weight
TRK18440	Coupler - 3-circuit - Angled feed - Inner	-
TRK18441	Coupler - 3-circuit - Angled feed - Outer	-
TRK18442	Coupler - 3-circuit - Tee feed - Outer/right	-
TRK18443	Coupler - 3-circuit - Tee feed - Outer/left	-
TRK18444	Coupler - 3-circuit - Cross	-
TRK18445	Coupler - 3-circuit - Flexible	-
TRK18446	Coupler - 3-circuit - Straight	-
TRK18457	Coupler - DALI 3-circuit - Angled feed - Inner	-
TRK18458	Coupler - DALI 3-circuit - Angled feed - Outer	-
TRK18459	Coupler - DALI 3-circuit - Tee feed - Outer/right	-
TRK18460	Coupler - DALI 3-circuit - Tee feed - Outer/left	-
TRK18461	Coupler - DALI 3-circuit - Cross	-
TRK18462	Coupler - DALI 3-circuit - Flexible	-
TRK18463	Coupler - DALI 3-circuit - Straight	-


Finishing Components

Product code	Description	Weight
TRK18466	End cap - Must be used on every bare-end of track	-
TRK18436	Cover plate - 3-circuit - Cross - For use with recessed track / can be cut to fit angled feeds	-
TRK18437	Cover plate - 3-circuit - Straight - For use with recessed track	-
TRK18453	Cover plate - DALI 3-circuit - Cross - For use with recessed track / can be cut to fit angled feeds	-
TRK18454	Cover plate - DALI 3-circuit - Straight - For use with recessed track	-
TRK20970	Wire suspension kit - 5 m length	-
TRK18465	Rod suspension - 2 m length	-

Accessories

Product code	Description	Weight
TRK18469	Bending Tool - Prepares conductors when track is cut to length	-
TRK18515	Rod suspension bracket - For use when recessing in suspended ceilings	-





Click or scan here
View Track variants using our online filtering tool



Information is correct as of 16 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.