
# Flexview

## Recessed picture luminaire with dual light engine - backlit panel and edge-lit T-bar mounted continuous perimeter.

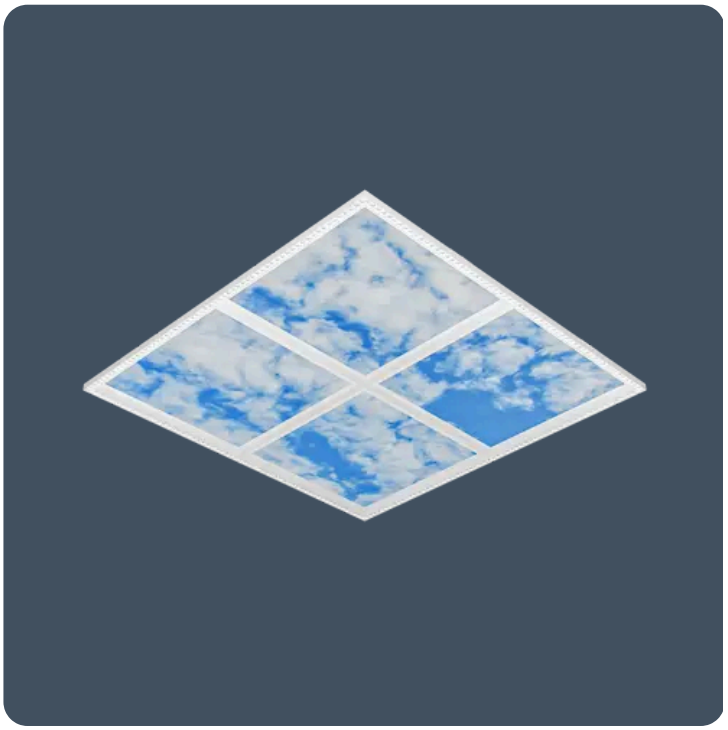

With its striking skylight effect, Flexview is a high-efficiency, recessed lay-in luminaire featuring a dual light engine.

Designed to form the centrepiece of a room's lighting scheme, Flexview combines continuous T-bar mounted Flexline perimeter illumination with a backlit 600 x 600 "picture window" panel to enhance visual interest and comfort. Flexview integrates seamlessly with the linear Flexline system, enabling the effective illumination of interior environments using sophisticated, low-glare optics.

Applications: teaching spaces, offices, corridors, waiting rooms, break-out spaces, reception areas, retail, and windowless rooms.

- Dual light engine design, perimeter light engine for main illumination and secondary light engine for the picture window
- Black 'invisible' light source, metallised low glare and white reflector options
- Multiple kit options available
- Back-lit panel remains at constant brightness (does not dim)

**IP20** | **Up to 100.5 LL/CW** | SMARTSCAN | LUXGUARD | **TM66 circularity score 2.7**

## Specification

| | | | |
|---|---|---|---|
| Mounting | **Recessed** | IP rating | **IP20** |
| Nominal size | **1.2 x 1.2 m**<br>**1.2 x 2.4 m**<br>**1.8 x 1.2 m**<br>**2.4 x 2.4 m** | Max presence detection height | **8 m** |

## Sustainability

| | |
|---|---|
| TM66 circularity score | **2.7** |

## Lighting

| | | | |
|---|---|---|---|
| Lumen output | **2,460 lm - 10,170 lm** | Efficacy | **Up to 100.5 LL/CW** |
| Additional light element | **Illuminated picture window** | | |

## Power

| | | | |
|---|---|---|---|
| LED power | **28 W - 106 W** | Circuit power | **35 W - 119 W** |

## Construction

| | | | |
|---|---|---|---|
| Housing | **Extruded aluminium frame** | Finish | **Full polyester powder coat** |
| Body colour | **White (RAL 9016)** | Optical assembly | **High performance optical system with a dedicated lens for each LED** |
| Reflector colour | **Black reflector**<br>**Metallised reflector**<br>**White reflector** | | |

## LED characteristics


| | | | |
|---|---|---|---|
| CRI | **80+** | Colour temperature | **4000 K** |
| Rated life (hours) | **100 K - L90/B10** | LED protection | **LUX Guard** |
| Driver efficiency | **>74%** | Replaceable light source | **Yes** |
| Power factor | **>0.85** | MacAdam ellipse | **3 Step** |
| Flicker metric | **IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4** | | |

## Compliance

| | | | |
|---|---|---|---|
| UKCA | **Yes** | CE | **Yes** |
| Energy efficiency class | **This product contains a light source of energy efficiency class A** | Thermoplastic rating | **TP(a)** |

## Dimensions

### Per Flexview module

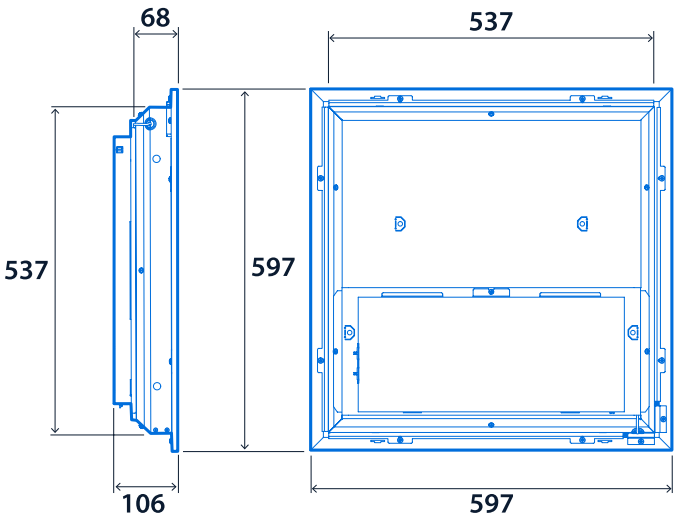


NOTE: Suitable for exposed
T-Bar lay-in ceilings only


# Flexview

## Range

| Product | Wattage | Size | Reflector | Lighting control system |
|---|---|---|---|---|
| **FV** Flexview | **28** 28 W<br>**31** 31 W<br>**35** 35 W | **04** 1.2 x 1.2 m - Four | **W** White<br>**M** Metallised<br>**B** Black | **S** SmartScan Internal<br>**A** Dimming (DALI) *<br>**L** Non-dimming |
| | **39** 39 W<br>**44** 44 W<br>**48** 48 W | **06** 1.2 x 1.8 m - Six | | |
| | **51** 51 W<br>**56** 56 W<br>**62** 62 W | **08** 1.2 x 2.4 m - Eight | | |
| | **91** 91 W<br>**98** 98 W<br>**106** 106 W | **16** 2.4 x 2.4 m - Sixteen | | |

* Retractive switch dimming **not** available

E.g. **FV2804WS** = Flexview / 28 W / 1.2 x 1.2 m - Four / White reflector / SmartScan Internal

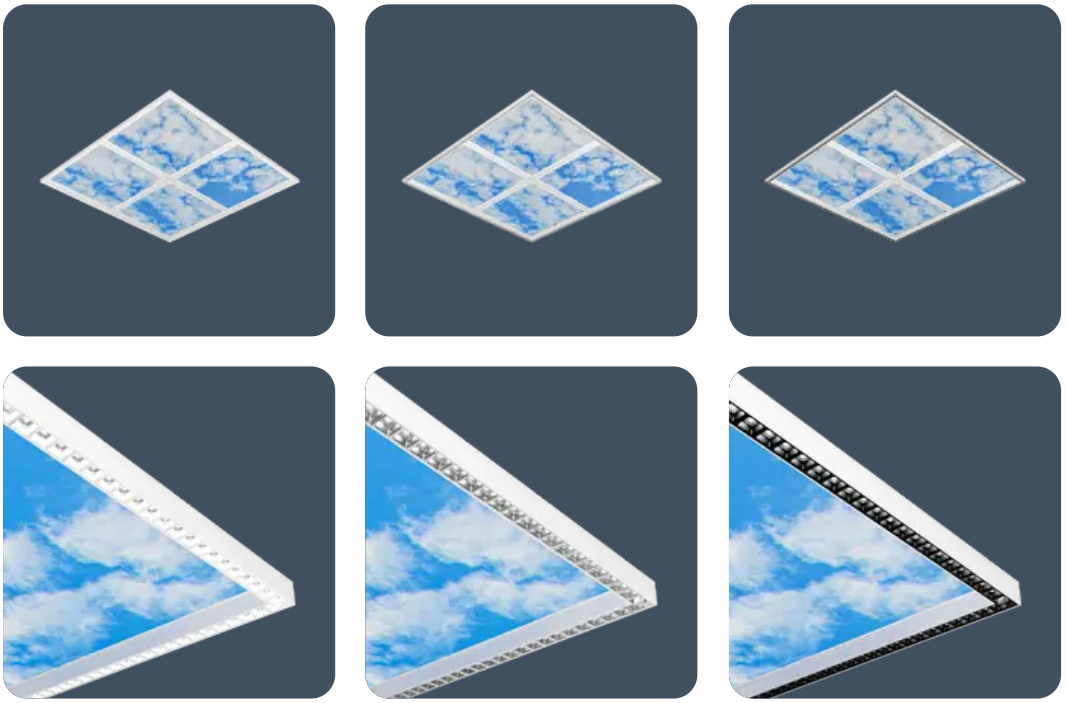

## Click or scan here

**View Flexview variants using our online filtering tool**



Information is correct as of 03-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.