G3 Pro Surface

Enhanced circular surface downlighters

Further expanding the G3 range, G3 Pro Surface is a surface-mounted or suspended luminaire that features a high-performance metalised inner reflector with wide- or narrow-distribution options.

G3 Pro is available with a choice of white or anti-glare black injection-moulded outer reflector. The luminaire offers excellent glare control at 50° and above. Finally, G3 Pro Surface is available with very efficient LEDs in 11 W, 24 W, and high-output 40 W versions.

Applications: staircases, entrance spaces, offices, corridors, reception areas, toilets, and retail.

- Choice of white or anti-glare black injection moulded flame-retardant outer reflector for dynamic appearance
- Tool free access and no visible fixings
- Excellent glare control at 50° and above
- CRI 80 and CRI 90 available as standard. CRI 90 LEDs with enhanced R9 value available to special order
- Suspended option via suspension kit (sold separately)



IP40 **Up to 121.4 LL/CW**

Specification

Mounting	**Surface** **Suspended**	IP rating	**IP40**

Lighting

Distribution	**Broad** **Narrow**	Lumen output	**1,570 lm - 4,855 lm**
Efficacy	**Up to 121.4 LL/CW**		

Emergency data

Emergency lumen output	**185 lm - 200 lm**	Emergency type	**Maintained**
Emergency duration	**3 hours**	Battery specification	**Nickel Metal Hydride (NiMH)**

Power

LED power	**11 W - 40 W**	Circuit power	**14 W - 45 W**

G3 Pro Surface

Construction

Housing	**Spun aluminium body**	Finish	**Full polyester powder coat**
Body colour	**White (RAL 9016)**	Optical assembly	**High performance vacuum metalised inner reflector with injection moulded flame-retardant outer reflector**
Reflector colour	**Black reflector** **White reflector**		


LED characteristics

CRI	**80+**	Colour temperature	**3000 K** **4000 K**
Rated life (hours)	**50 K - L70/B10**	Driver efficiency	**>80%**
Replaceable light source	**Yes**	Power factor	**>0.9**
MacAdam ellipse	**3 Step**	Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**

Compliance

UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class D**		

Dimensions

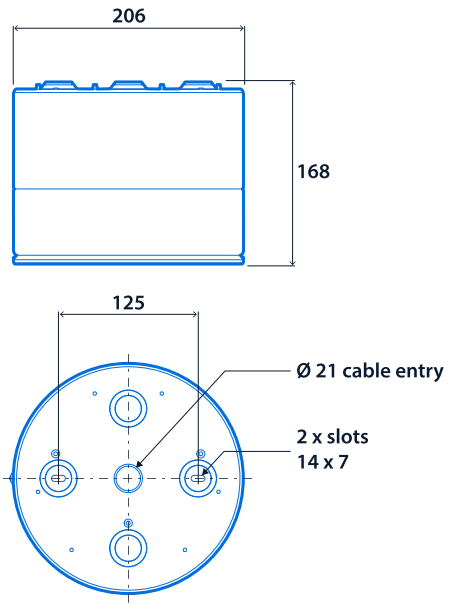

G3 Pro Surface

Range

	Product version	LED power	Emergency system (optional)	3000 K	4000 K	Lighting control system
White outer reflector	Broad distribution	11 W	T	GT19890	GT19894	A / L
		24 W	T	GT19891	GT19895	A / L
		40 W	-	GT19892	GT19896	A / L
	Narrow distribution	40 W	-	GT19893	GT19897	A / L
Black outer reflector	Broad distribution	11 W	T	GT19898	GT19902	A / L
		24 W	T	GT19899	GT19903	A / L
		40 W	-	GT19900	GT19904	A / L
	Narrow distribution	40 W	-	GT19901	GT19905	A / L

Emergency system - prefix catalogue number with **T** AutoTest Emergency
Lighting control system - suffix catalogue number with **A** Dimming (DALI) / **L** Non-dimming

E.g. **TGT19890A** = White outer reflector / Broad distribution / 11 W / AutoTest Emergency / 3000 K / Dimming (DALI)

Accessories

Product code	Description	Weight
GT19906	Wire suspension kit - 3 m length	0.05 kg






Click or scan here

View G3 Pro Surface variants using our online filtering tool



Information is correct as of 04 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.