Kanby Pro

Wide-body LED controller luminaires


Kanby Pro is a stylish, high-efficiency linear LED luminaire from Thorlux, designed for rapid installation.

This wide-bodied luminaire is manufactured from steel, with a polycarbonate cover and a choice of optics. All versions have a conduit entry at either end as standard, with no additional drilling or cutting required. BESA fixings are located at 600 mm centres, with multiple cable entries to enable retrofitting without modifying the luminaire. Kanby Pro is an ideal retrofit solution to replace obsolete linear fluorescent lights.

Part of the long-standing Kanby range from Thorlux Lighting.

Applications: hospitals, schools, and social housing.

- Polycarbonate diffuser: Carefully controlled nanoprism optic version for EN12464-1 / LG7 (<3000 cd/m² @ 65º) compliance or opal version
- Fire-retardant external plastic parts
- Designed to exclude dust, dirt and flies
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

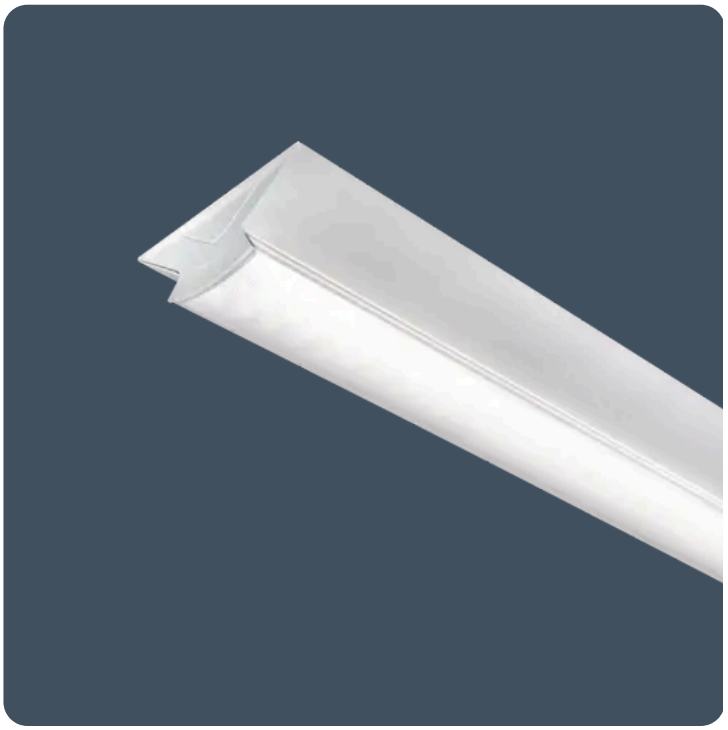

IP40 | Up to 138.8 LL/CW | SMARTSCAN | LUXGUARD

Specification

Mounting	**Surface**	IP rating	**IP40**
Nominal size	**1200 mm** **1500 mm**	Max presence detection height	**8 m**

Lighting

Optic	**Low glare diffuser** **Opal diffuser**	Lumen output	**2,190 lm - 6,510 lm**
Efficacy	**Up to 138.8 LL/CW**		

Emergency data

Emergency lumen output	**330 lm - 380 lm**	Emergency type	**Maintained**
Emergency duration	**3 hours**	Battery specification	**Lithium Iron Phosphate (LiFePO4)**

Kanby Pro

Power

LED power	**15 W - 43 W**	Circuit power	**19 W - 49 W**

Construction

Housing	**Steel body with polycarbonate screw-on end caps with concealed fixings**	Finish	**Full polyester powder coat**
Body colour	**Satin white (RAL9016)**	Optical assembly	**Polycarbonate fire-retardant diffuser**

LED characteristics


CRI	**80+**	Colour temperature	**4000 K**
Rated life (hours)	**100 K - L90/B10**	LED protection	**LUX Guard**
Driver efficiency	**>85%**	Replaceable light source	**Yes**
Power factor	**>0.9**	MacAdam ellipse	**3 Step**
Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**		

Compliance


UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class B**		

Dimensions

1200 versions

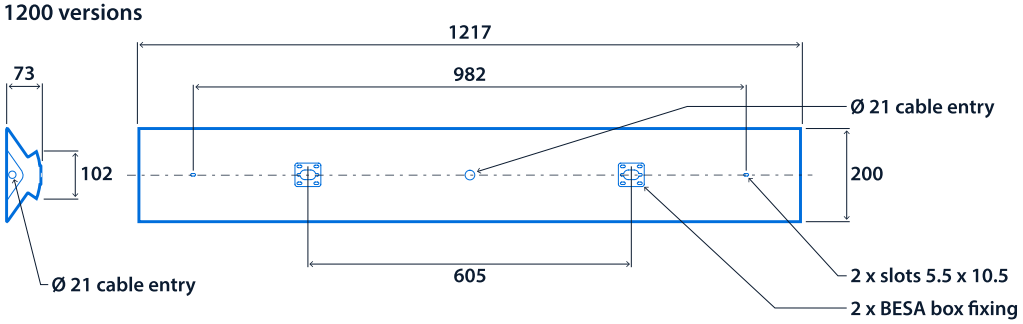

1500 versions

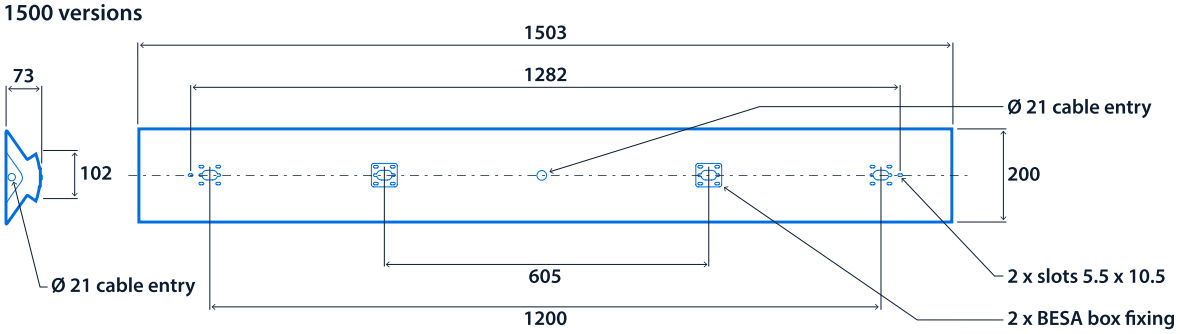


Range

	Nominal size	LED power	Emergency system (optional)	Opal	Low glare	Lighting control system
SmartScan	1200 mm	15 W	**W**	**KP18911**	**KP18919**	**SS**
		26 W	**W**	**KP18912**	**KP18920**	**SS**
	1500 mm	22 W	**W**	**KP18916**	**KP18924**	**SS**
		36 W	**W**	**KP18917**	**KP18925**	**SS**
		43 W	**W**	**KP18918**	**KP18926**	**SS**
Standard	1200 mm	15 W	**T / E**	**KP18927**	**KP18935**	**A / L**
		26 W	**T / E**	**KP18928**	**KP18936**	**A / L**
	1500 mm	22 W	**T / E**	**KP18932**	**KP18940**	**A / L**
		36 W	**T / E**	**KP18933**	**KP18941**	**A / L**
		43 W	**T / E**	**KP18934**	**KP18942**	**A / L**

Emergency system - prefix catalogue number with **W** SmartScan Emergency / **T** AutoTest Emergency / **E** Standard Emergency
Lighting control system - suffix catalogue number with **SS** SmartScan Internal / **A** Dimming (DALI) / **L** Non-dimming

E.g. **WKP18911SS** = 1200 mm / 15 W / SmartScan Emergency / Opal / SmartScan Internal





Click or scan here

View Kanby Pro variants using our online filtering tool



Information is correct as of 02-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.