Seven

Architectural surface-mounted LED exit signs



Seven is an elegant emergency exit sign luminaire with an acrylic legend panel.

Designed for architectural applications where aesthetics are prized, Seven is suitable for ceiling, wall or cantilever mounting. The Seven luminaire uses Lithium Iron Phosphate ($LiFePO_4$) battery technology, which provides three hours of maintained emergency operation. $LiFePO_4$ batteries offer advantages such as a longer lifespan, lower energy consumption, and a compact battery cell. SmartScan wireless communication versions are also available.

Applications: commercial and retail environments.

- Low power consumption (1 W total)
- Extremely long LED lifetime, up to 100,000 hours
- Very easy battery compartment access
- Ceiling mounted with optional kits for wall and cantilever mounting
- 26 m maximum viewing distance in accordance with BS EN 1838
- Choice of legends
- Status indicator shows operational condition
- Reliable Lithium Iron Phosphate (LiFePO4) battery technology

IP20 SMARTSCAN

Specification

Mounting	**Surface**	IP rating	**IP20**

Emergency data

Legend type	**EURO arrow down** **EURO arrow left** **EURO arrow left / right double sided** **EURO arrow right** **ISO 7010 arrow down** **ISO 7010 arrow left** **ISO 7010 arrow left / right double sided** **ISO 7010 arrow right** **ISO 7010 arrow up**	Maximum viewing distance	**26 m**
Emergency type	**Maintained**	Emergency duration	**3 hours**
Battery specification	**Lithium Iron Phosphate (LiFePO4)**		

Power

LED power	**4 W**

Construction


Housing	**Polycarbonate body**	Body colour	**Silver**
Optical assembly	**Acrylic legend panel**		

Compliance


UKCA	**Yes**	CE	**Yes**

Dimensions


Ceiling Mounting

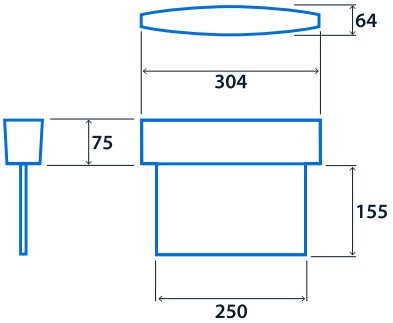

Wall Mounting

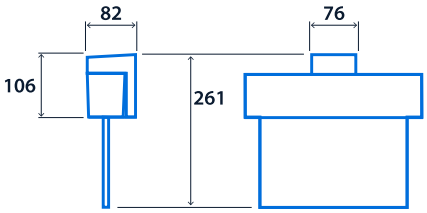

Cantilever Mounting



Range

	Description	Emergency system	CAT. No.	Emergency duration	Emergency type
ISO 7010 legend	Arrow left	**W / D / E**	**SV20951**	3 hour	Maintained
	Arrow right	**W / D / E**	**SV20952**	3 hour	Maintained
	Arrow down	**W / D / E**	**SV20953**	3 hour	Maintained
	Arrow up	**W / D / E**	**SV20954**	3 hour	Maintained
	Arrow left / right double sided	**W / D / E**	**SV20955**	3 hour	Maintained
EURO legend	Arrow left	**W / D / E**	**SV20956**	3 hour	Maintained
	Arrow right	**W / D / E**	**SV20957**	3 hour	Maintained
	Arrow down	**W / D / E**	**SV20958**	3 hour	Maintained
	Arrow left / right double sided	**W / D / E**	**SV20959**	3 hour	Maintained

Emergency system - prefix catalogue number with **W** SmartScan Emergency / **D** DALI / Self-Test Emergency / **E** Standard Emergency

E.g. **WSV20951** = ISO 7010 arrow left / SmartScan Emergency

Accessories

Product code	Description	Weight
SV13630	Wall or cantilever mounting kit	0.2 kg

Spares

Product code	Description	Weight
EMB702GP	Lithium Iron Phosphate (LiFePO4) battery - End of life batteries can be returned to Thorlux for recycling	0.15 kg





Click or scan here
View Seven variants using our online filtering tool



Information is correct as of 04-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.