SmartScan Gateway Lite

Master control and web interface with SmartScan wireless communication



Like the more powerful standard Gateway, the SmartScan Gateway Lite is a control and web interface device that sits at the heart of a SmartScan lighting management system.

The Gateway Lite transmits SmartScan and SmartScan emergency luminaire status reports to the SmartScan web server. It can monitor and control up to 50 wireless luminaires, making it an ideal choice for smaller projects. As with the standard Gateway, it controls emergency lighting testing dates/times and external lighting switching times.

- Polycarbonate body finished white (RAL9016)
- Central monitoring for up to 50 SmartScan and SmartScan emergency luminaires - ideal for smaller projects
- Central time control for SmartScan External luminaires
- Communicates with the SmartScan website using MQTTS mobile telecommunications
- Enables scheduled emergency test times / dates managed using the SmartScan website
- Status Indicators show operational condition
- Software security updates will be provided for a minimum of 10 years
- Ethernet connection for alternate connectivity to SmartScan website

Notes: SmartScan Gateway Lite is limited to a single poll every 24 hours and no live occupancy detection option.

IP65 SMARTSCAN


Specification

IP rating	**IP65**

Compliance

UKCA	**Yes**	CE	**Yes**

Dimensions

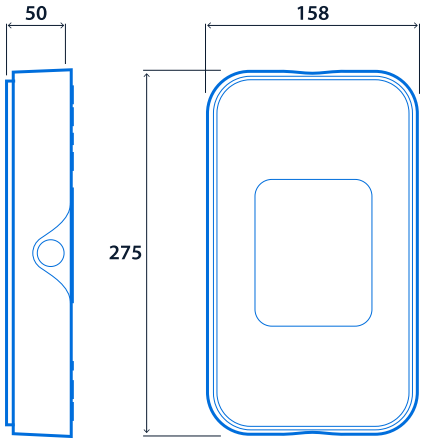

SmartScan Gateway Lite

Range

Description	CAT. No.
SmartScan Gateway Lite	**SS21242**



Click or scan here

View SmartScan Gateway Lite variants using our online filtering tool



Information is correct as of 04 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.