Solow LED Emergency

High-performance emergency high-/low-bay luminaires



A classic Thorlux industrial product, the Solow LED Emergency is a non-maintained emergency high-/low-bay luminaire with high lumen output to illuminate open areas, escape routes or points of emphasis.

The unique body profile minimises dust collection and is easy to wipe clean; Solow LED Emergency is available with a choice of narrow or broad optics to distribute light in the required direction. This hard-wearing luminaire is rated IP64 for dust ingress protection and IK11 impact resistance. Solow LED Emergency uses snap-fit stainless steel mounting brackets for easy installation.

Applications: industrial, warehouse, logistics centres, large open areas, and sports halls.

- High quality control gear and LEDs designed to achieve 100,000 hour life expectancy
- Broad or narrow distribution
- Smooth wipe clean surfaces, no dust traps
- Three hour, non-maintained operation
- Complies with food production standards IFS, HACCP and BRC
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

IP64 IK11 SMARTSCAN

Specification

Mounting	**Surface**	IP rating	**IP64**
Impact rating	**IK11**		

Lighting

Distribution	**Broad** **Narrow**

Emergency data

Emergency lumen output	**1,095 lm - 1,150 lm**	Emergency type	**Non-maintained**
Emergency duration	**3 hours**	Battery specification	**Nickel Metal Hydride (NiMH)**

Solow LED Emergency

Power

LED power	**8 W**

Construction

Housing	**Extruded aluminium body with polycarbonate injection moulded end caps**	Finish	**Anodised**
Body colour	**Silver**	Optical assembly	**Extruded polycarbonate refractor**


LED characteristics

Colour temperature	**4000 K**

Compliance

UKCA	**Yes**	CE	**Yes**
D Mark	**Yes**	Ball impact resistance	**DIN EN 18032 Part 3 and DIN VDE 0710 Part 13**

Dimensions

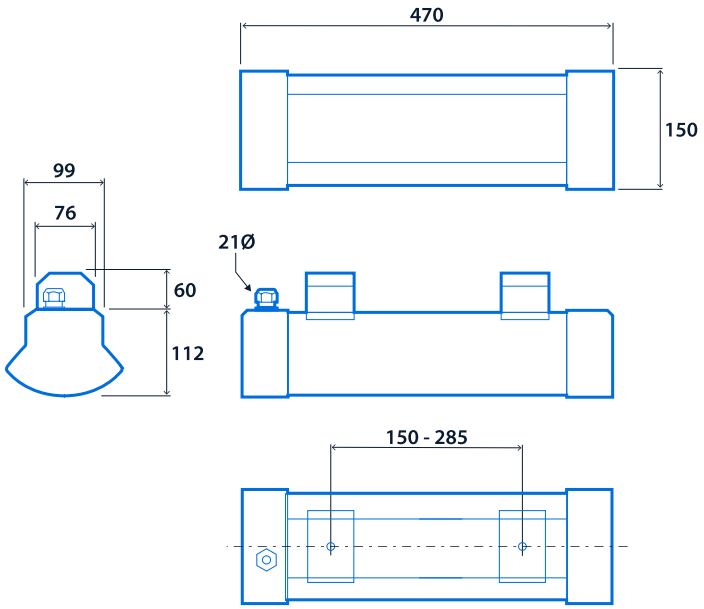

Solow LED Emergency


Range

LED power	Emergency system	Broad	Narrow	Emergency duration	Emergency type
8 W	**W / D / E**	**WL17381**	**WL17382**	3 hour	Non-maintained


Emergency system - prefix catalogue number with **W** SmartScan Emergency / **D** DALI / Self-Test Emergency / **E** Standard Emergency
E.g. **WWL17381** = 8 W / SmartScan Emergency / Broad

Solow LED Emergency









Click or scan here

View Solow LED Emergency variants using our online filtering tool



Information is correct as of 04 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.