Strike M Pendant

Stylish pendant spotlights

Strike M Pendant is a modern suspended spotlight with integral control gear, available for both surface and track mounting.

The Strike M Pendant is ideally suited for display and feature applications. The adaptable design features interchangeable, low-glare optics available in a range of beam angles to provide a smooth distribution and reduce spill light.

Strike M is supplied with an adjustable 2-metre braided cable. It boasts the same excellent performance as the Strike S and Strike M spotlight luminaires, including 3000 K and 4000 K temperature options as standard, and CRI 90 LEDs for high-quality colour rendering.

Applications: display and feature, retail, reception areas, and hospitality.

- Die-cast aluminium body
- TM66 score of 2.5 - LIA/CIBSE certification scheme TSD-012 verified
- Braided 2 m adjustable suspension cable
- Low glare optical control
- Optimised beam distribution using lens technology for reduced spill light
- Fitted with CRI 90 LEDs



IP20 **Up to 123.1 LL/CW** **TM66 circularity score 2.5**

Specification

Mounting	**Surface** **Track**	IP rating	**IP20**

Sustainability

TM66 circularity score	**2.5**

Lighting

Distribution	**22° beam - Narrow** **33° beam - Wide** **54° beam - Flood**	Lumen output	**1,900 lm - 3,200 lm**
Efficacy	**Up to 123.1 LL/CW**		

Strike M Pendant

Power

LED power	**15 W - 22 W**	Circuit power	**18 W - 26 W**

Construction

Housing	**Die-cast aluminium body**	Finish	**Full polyester powder coat**
Body colour	**Black (RAL 9005)** **White (RAL 9016)**	Optical assembly	**Polycarbonate high efficiency LED lenses**

LED characteristics

CRI	**90+**	Colour temperature	**3000 K** **4000 K**
Rated life (hours)	**67 K - L80/B10**	Driver efficiency	**>85%**
Replaceable light source	**Yes**	Power factor	**>0.95**
MacAdam ellipse	**3 Step**	Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**


Compliance

UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class C** **This product contains a light source of energy efficiency class D**		


Strike M Pendant

Dimensions

Surface mounted

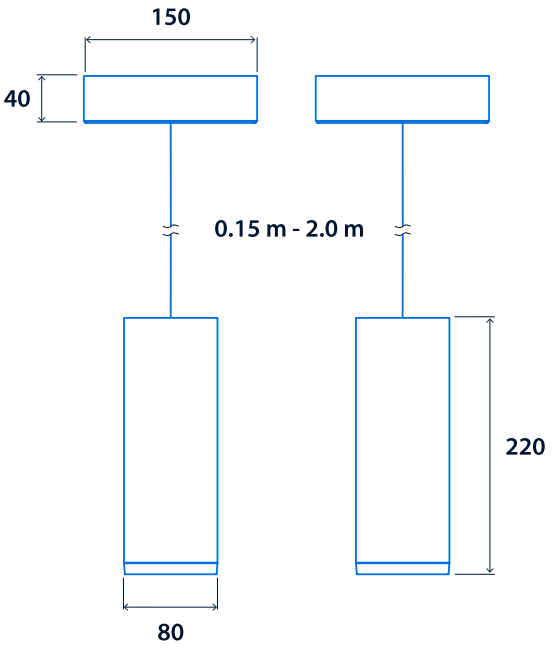

Track mounted

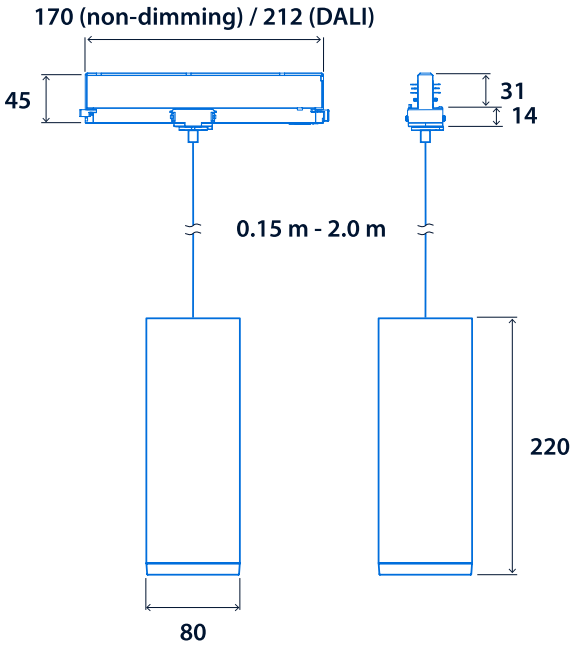

Strike M Pendant

Range

Product	Size	LED power	Mounting	Distribution	Colour temperature	Body colour	Lighting control system
SR Strike Pendant	**M** 80 mm dia.	**15** 15 W **19** 19 W **22** 22 W	**S** Surface **T** Track	**N** 22° - Narrow **W** 33° - Wide **F** 54° - Flood	**3** 3000 K **4** 4000 K	**W** White **B** Black	**A** Dimming (DALI) **L** Non-dimming

E.g. **SKM15SN3WA** = 80 mm dia. / 15 W / Surface mounted / Narrow - 22° / 3000 K / White body / Dimming (DALI)

Spares

Product code	Description	Weight
SKM20890	Front trim - White	0.09 kg
SKM20891	Front trim - Black	0.09 kg
SKM20892	22° Narrow Optic	0.08 kg
SKM20894	33° Wide Optic	0.08 kg
SKM20895	54° Flood Optic	0.08 kg



Click or scan here

View Strike M Pendant variants using our online filtering tool



Information is correct as of 02-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.