Strike S

Track-mounted adjustable spotlights



Strike S is a stylish, track-mounted luminaire with discreet in-track control gear.

The smallest in the Strike spotlight range, Strike S features interchangeable low-glare optics which provide a smooth distribution. The optics are available in either narrow (26°), wide (37°), or flood (53°) beams as required.

Strike S is supplied with CRI 90 LEDs for excellent colour quality, in either 3000 K or 4000 K as standard. The spotlight can be rotated through 350° azimuth and 90° vertically for a full, versatile range of movement. For use with the Track system.

Applications: display and feature, retail, reception areas, hospitality, art galleries, museums, and libraries.

- Die-cast aluminium body
- TM66 score of 2.5 - LIA/CIBSE certification scheme TSD-012 verified
- 350° azimuth and 90° vertical adjustment
- Low glare optical control
- Optimised beam distribution using lens technology for reduced spill light
- Fitted with CRI 90 LEDs, suitable for retail applications
- Suitable for installation into Global track

IP20 **Up to 123.1 LL/CW** **TM66 circularity score 2.5**

Specification

Mounting	**Track**	IP rating	**IP20**

Sustainability

TM66 circularity score	**2.5**

Lighting

Distribution	**26° beam - Narrow** **37° beam - Wide** **53° beam - Flood**	Lumen output	**900 lm - 2,225 lm**
Efficacy	**Up to 123.1 LL/CW**		

Strike S

Power

LED power	**6 W - 17 W**	Circuit power	**8 W - 20 W**

Construction

Housing	**Die-cast aluminium body**	Finish	**Full polyester powder coat**
Body colour	**Black (RAL 9005)** **White (RAL 9016)**	Optical assembly	**One-piece interchangeable acrylic lens and reflector optic**


LED characteristics

CRI	**90+**	Colour temperature	**3000 K** **4000 K**
Rated life (hours)	**67 K - L80/B10**	Driver efficiency	**>81%**
Replaceable light source	**Yes**	Power factor	**>0.95**
MacAdam ellipse	**3 Step**	Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**

Compliance

UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class C** **This product contains a light source of energy efficiency class D**		

Dimensions

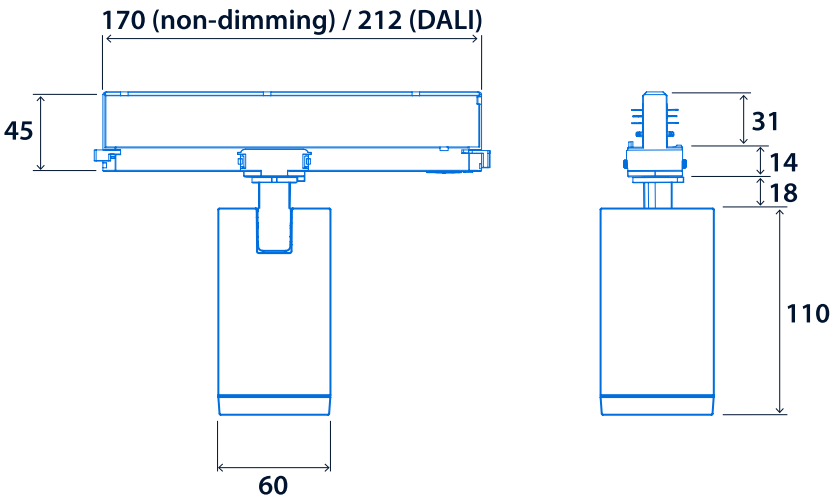

Strike S

Range

Product	Size	LED power	Mounting	Distribution	Colour temperature	Body colour	Lighting control system
SK Strike	**S** 60 mm dia.	**06** 6 W **12** 12 W **17** 17 W	**T** Track	**N** 26° - Narrow **W** 37° - Wide **F** 53° - Flood	**3** 3000 K **4** 4000 K	**W** White **B** Black	**A** Dimming (DALI) **L** Non-dimming

E.g. **SKS06TN3WA** = 60 mm dia. / 6 W / Track mounted / Narrow - 26° / 3000 K / White body / Dimming (DALI)

Spares

Product code	Description	Weight
SKS20880	Front trim - White	0.06 kg
SKS20881	Front trim - Black	0.06 kg
SKS20882	26° Narrow Optic	0.03 kg
SKS20884	37° Wide Optic	0.03 kg
SKS20885	53° Flood Optic	0.03 kg


Track mounted non-dimming in white


Track mounted DALI dimming in black


Narrow optic - 26° beam


Wide optic - 37° beam


Flood optic - 53° beam

Click or scan here

View Strike S variants using our online filtering tool



Information is correct as of 02-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.