Tetra Surface

Surface-mounted LED square downlighters


Tetra Surface is an elegant, low-profile, surface-mounted square luminaire, constructed from electro-zinc-coated steel.

This contemporary-looking downlighter offers a premium feel, combined with superior glare control and brilliant performance. The 90-degree area optic allows Tetra Surface to be used either individually or in conjunction with other luminaires.

Available with white, black, or metallised polycarbonate reflectors, the Tetra Surface will integrate seamlessly into a broad range of interior environments.

Applications: ancillary areas, circulation, toilets, changing rooms, reception areas, and office break-out spaces.

- Black, metallised and white reflector options
- CRI 90 option available to special order
- SmartScan wireless technology removed the need for control cabling. Ideal for retro-fit

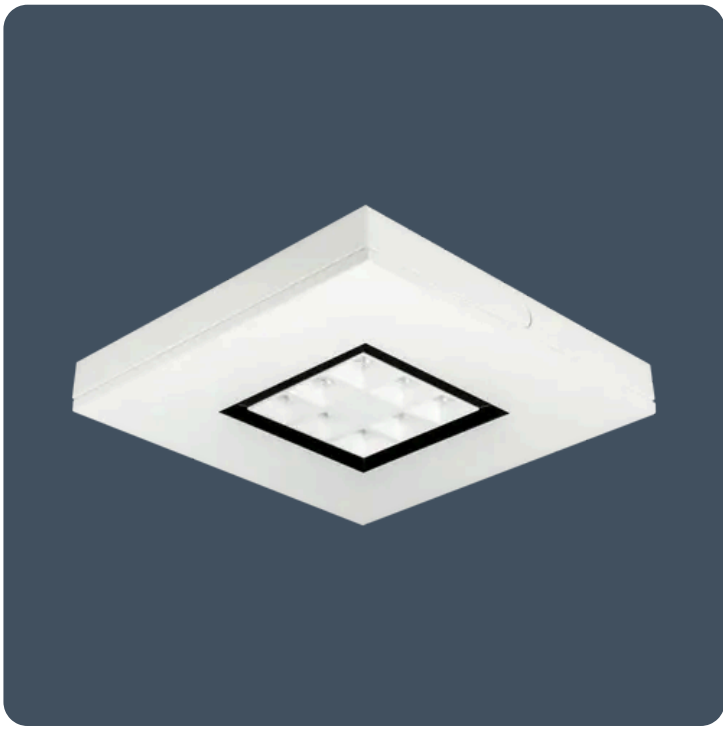

IP40 (IP20 above ceiling) **Up to 137.3 LL/CW** **SMARTSCAN** **LUXGUARD** **TM66 circularity score 2.6**

Specification

Mounting	**Surface**	IP rating	**IP40 (IP20 above ceiling)**
Max presence detection height	**8 m**		

Sustainability

TM66 circularity score	**2.6**

Lighting

Lumen output	**1,330 lm - 2,470 lm**	Efficacy	**Up to 137.3 LL/CW**

Emergency data

Emergency lumen output	**350 lm - 395 lm**	Emergency type	**Non-maintained**
Emergency duration	**3 hours**	Battery specification	**Lithium Iron Phosphate (LiFePO4)**

Tetra Surface

Power

LED power	**9 W - 16 W**	Circuit power	**11 W - 18 W**

Construction

Housing	**Zinc coated steel body and reflector**	Finish	**Full polyester powder coat**
Body colour	**Black (RAL 9005)**	Bezel colour	**White (RAL 9016)**
Reflector colour	**Black reflector** **Metallised reflector** **White reflector**		


LED characteristics

CRI	**80+**	Colour temperature	**4000 K**
Rated life (hours)	**100 K - L80/B10**	LED protection	**LUX Guard**
Driver efficiency	**>82%**	Replaceable light source	**Yes**
Power factor	**>0.9**	MacAdam ellipse	**3 Step**
Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**		

Compliance

UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class A**		

Dimensions

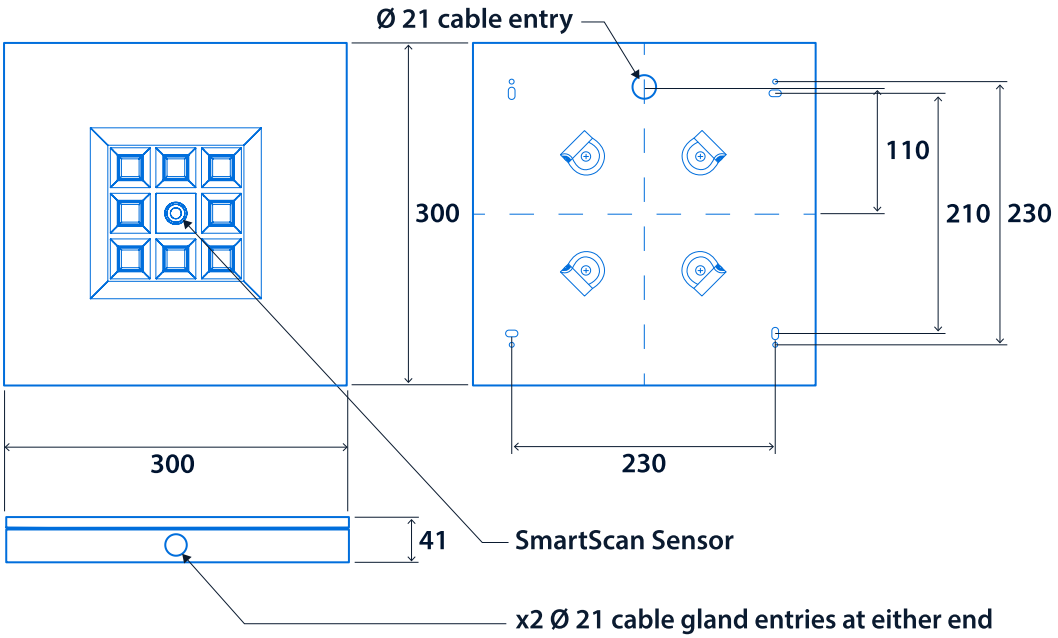
Ø 21 cable entry
300
110
210
230
300
230
41
SmartScan Sensor
x2 Ø 21 cable gland entries at either end


Tetra Surface

Range

Emergency system (optional)	Product	LED power	Optic	Reflector	Mounting	Product version	Lighting control system
W SmartScan Emergency*	**TA** Tetra	**09** 9 W	**A** Area 90°	**W** White	**S** Surface	**X** Open	**S** SmartScan Internal
D DALI / Self-Test Emergency**		**16** 16 W		**M** Metallised			**A** Dimming (DALI)
E Standard Emergency**				**B** Black			**L** Non-dimming

* **Only** available with **S** control type ** **Only** available with **A / L** control type

E.g. **WTA09AWSXS** = SmartScan Emergency / 9 W / Area 90° / White reflector / Surface / Open / SmartScan Internal

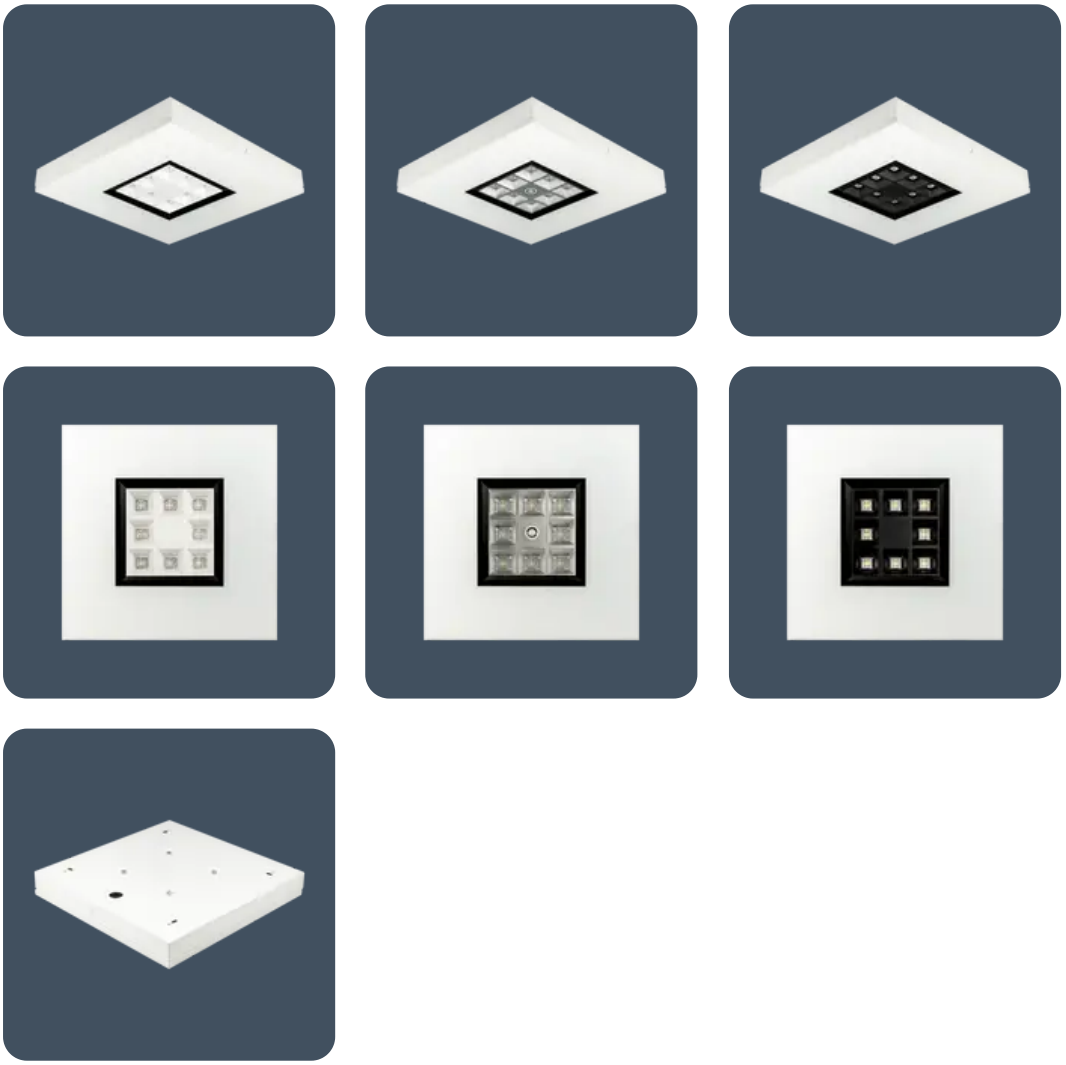

Click or scan here

View Tetra Surface variants using our online filtering tool



Information is correct as of 04 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.